



MODEL:

CMi681S














- 2.8" TFT Graphic Interface
- 6,000 Fingerprint(6,000 ID card)
- 160,000 Record
- Fingerprint/Card/Password/Fingerprint+Card/Fingerprint+Password
- TCP/IP,USB,U disk download
- ID Card
- Access control (downu power)
- Battery back up (working 2 hours)





Tel.(02)476-1146 Fax.(02)476-1164







Standalone Fingerprint Time Attendance Color Screen System





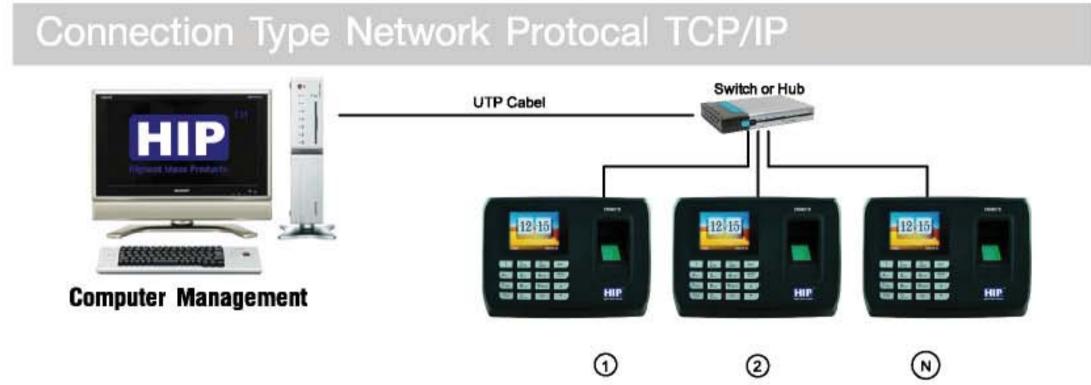

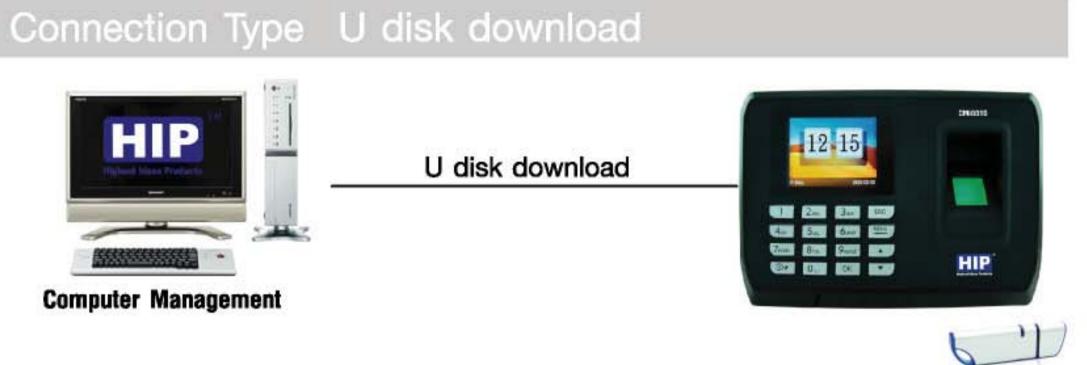

Technical Specification

Screen 2.8" TFT Graphic Interface Resolution 320"240 Fingerprint Capacity 6,000 Fingerprint(6,000 ID card) Record Capacity 160000 Record Identification Time <=0.5s" Identification Mode Fingerprint/Card/Password/Fingerprint+Card/Fingerprint+Password Authentication Mode "1:N" Communication Protocols TCP/IP,USB,U disk download Smart Card ID Card Other Function Access control (clow/fu power) Battery back up (working 2 hours) Sechedule Bell (ที่ตัวเครื่อง) Operating Environment Operating Temp:-10 °C ~ +60 °C, Humidity(RH):20%~80% Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM Optional Features Mifare Card(Option)		
Resolution 320°240 Fingerprint Capacity 6,000 Fingerprint(6,000 ID card) Record Capacity 160000 Record Identification Time <=0.5s" Identification Mode Fingerprint/Card/Password/Fingerprint+Card/Fingerprint+Password Authentication Mode "1:N" Communication Protocols TCP/IP,USB,U disk download Smart Card ID Card Other Function Access control (ciownu power) Battery back up (working 2 hours) Sechedule Bell (ricionsion) Operating Environment Operating Temp:-10°C ~ +60°C, Humidity(RH):20%~80% Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM	Model	CMi681S
Fingerprint Capacity 6,000 Fingerprint(6,000 ID card) Record Capacity 160000 Record Identification Time <=0.5s" Identification Mode Fingerprint/Card/Password/Fingerprint+Card/Fingerprint+Password Authentication Mode "1:N" Communication Protocols TCP/IP,USB,U disk download Smart Card ID Card Other Function Access control (clownu power) Battery back up (working 2 hours) Sechedule Bell (ricionsion) Operating Environment Operating Temp:-10 °C ~ +60 °C, Humidity(RH):20%~80% Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM	Screen	2.8" TFT Graphic Interface
Record Capacity 160000 Record Identification Time <=0.5s" Identification Mode Fingerprint/Card/Password/Fingerprint+Card/Fingerprint+Password Authentication Mode "1:N" Communication Protocols TCP/IP,USB,U disk download Smart Card ID Card Other Function Access control (downu power) Battery back up (working 2 hours) Sechedule Bell (name) Card Operating Environment Operating Temp:-10 Card Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM	Resolution	320*240
Identification Time	Fingerprint Capacity	6,000 Fingerprint(6,000 ID card)
Identification Mode	Record Capacity	160000 Record
Authentication Mode "1:N" Communication Protocols TCP/IP,USB,U disk download Smart Card ID Card Other Function Access control (ciowiu power) Battery back up (working 2 hours) Sechedule Bell (ricioinsou) Operating Environment Operating Temp:-10 °C ~ +60 °C, Humidity(RH):20%~80% Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM	Identification Time	<=0.5s"
TCP/IP,USB,U disk download Smart Card ID Card Other Function Access control (ciowinu power) Battery back up (working 2 hours) Sechedule Bell (ที่ตัวเครื่อง) Operating Environment Operating Temp:-10 °C ~ +60 °C, Humidity(RH):20%~80% Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM	Identification Mode	Fingerprint/Card/Password/Fingerprint+Card/Fingerprint+Password
Smart Card Other Function Access control (ciowiu power) Battery back up (working 2 hours) Sechedule Bell (ที่ตัวเครื่อง) Operating Environment Operating Temp:-10 °C ~ +60 °C, Humidity(RH):20%~80% Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM	Authentication Mode	"1:N"
Other Function Access control (ต่อพ่าน power) Battery back up (working 2 hours) Sechedule Bell (ที่ตัวเครื่อง) Operating Environment Operating Temp:-10 °C ~ +60 °C, Humidity(RH):20%~80% Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM	Communication Protocols	TCP/IP,USB,U disk download
Battery back up (working 2 hours) Sechedule Bell (ที่ตัวเครื่อง) Operating Environment Operating Temp:-10 °C ~ +60 °C, Humidity(RH):20%~80% Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM	Smart Card	ID Card
Sechedule Bell (ที่ตัวเครื่อง) Operating Environment Operating Temp:-10 °C ~ +60 °C, Humidity(RH):20%~80% Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM	Other Function	Access control (downu power)
Operating Environment Operating Temp:-10 °C ~ +60 °C, Humidity(RH):20%~80% Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM		Battery back up (working 2 hours)
Humidity(RH):20%~80% Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM		Sechedule Bell (ที่ตัวเครื่อง)
Power DC5V1A Language English,Thai Size 170(L)*120(W)*35(H) MM	Operating Environment	Operating Temp:-10°C ~ +60°C,
Language English,Thai Size 170(L)*120(W)*35(H) MM		Humidity(RH):20%~80%
Size 170(L)*120(W)*35(H) MM	Power	DC5V1A
	Language	English,Thai
Optional Features Mifare Card(Option)	Size	170(L)*120(W)*35(H) MM
	Optional Features	Mifare Card(Option)









